


Weatherproof analogue Intercom Telephone IC (IntellyCom)



Features



- ▶ Analogue intercom telephone with amplified listening in stainless steel housing
- ▶ Can be integrated into any analogue private branch exchange systems (PABX)
- ▶ Vandalism proof and extremely robust as system is based on pure amplified listening without receiver
- ▶ Integrated relay allows activation of individual switching actions such as door closing, signalling, etc.
- ▶ Programmable system features – for example: dialing procedures, automatic call acceptance or call rejection, automatic interlinking of telephone numbers when „busy“ or after a certain time elapsed, call melodies, ringing sound pressure levels, etc.
- ▶ Corrosion-free and robust stainless steel housings with IP 66 protection for outdoor and indoor applications
- ▶ Protected against unauthorized opening or manipulations of intercom telephone
- ▶ Tamper contact (sabotage contact)
- ▶ Integrated call display
- ▶ Models with microphone key and 3 speed code dialogue keys
- ▶ Surface and panel mount product options





Technical data

General data	IC
Housing	stainless steel
Terminals	cable gland 1x M20x1,5 cable diam. 8-12 mm 1x blind plug M20
Weight	~ 1,5 kg
Temperature range	-40° C to +60° C
Protection class	IP 66 (IEC60529)
Ringing volume	~ 80 dB (A) in 1 m

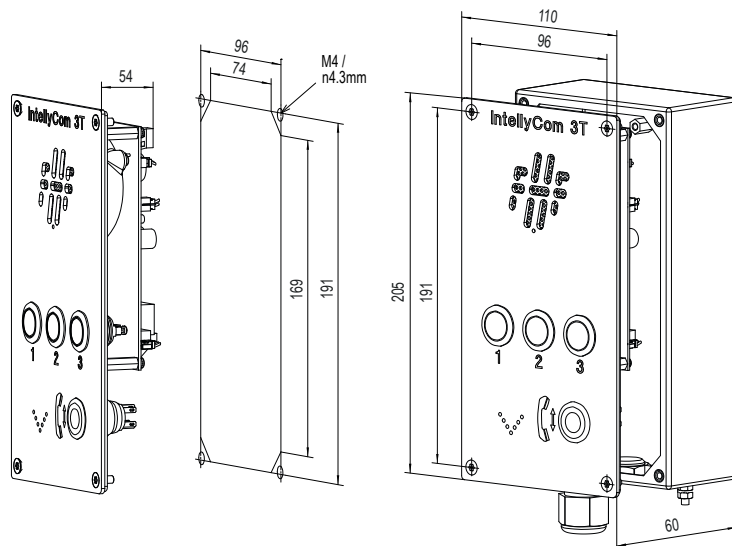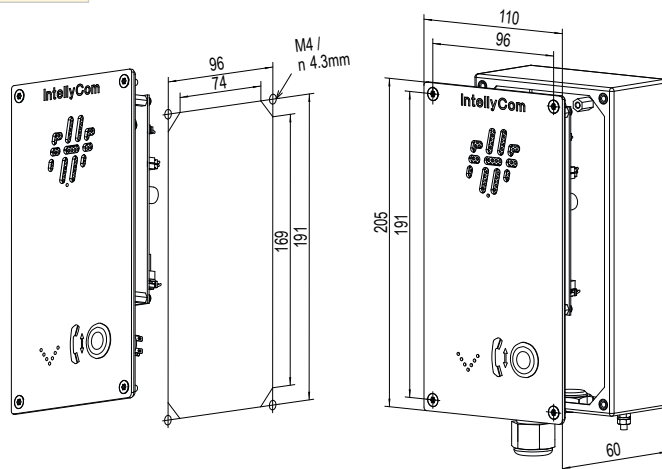

Order data

Type	Order No.	Denomination
IC1P	410 500 000	Weatherproof analogue Intercom Telephone „IntellyCom“, 1 key, for panel mounting
IC1S	410 500 100	Weatherproof analogue Intercom Telephone „IntellyCom“, 1 key, for surface mounting
IC3P	410 510 000	Weatherproof analogue Intercom Telephone „IntellyCom“, 3 keys, for panel mounting
IC3S	410 510 100	Weatherproof analogue Intercom Telephone „IntellyCom“, 3 keys, for surface mounting

