


UF300BNA Series

Size : $\varnothing 398 \times 98.3$


Unit : mm



Thermally-Protected

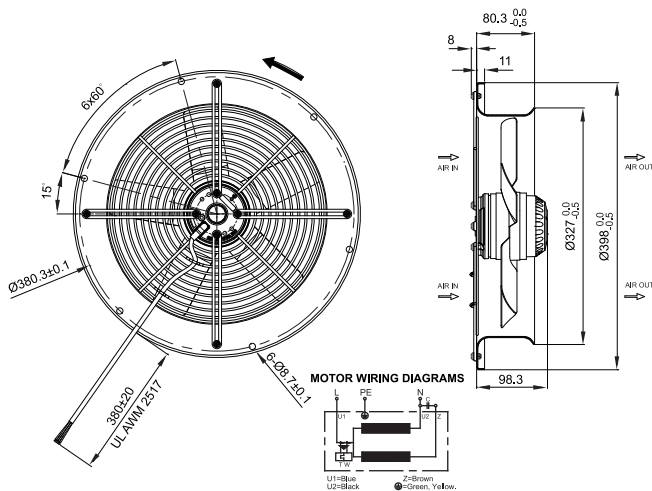

(Axial Fan)

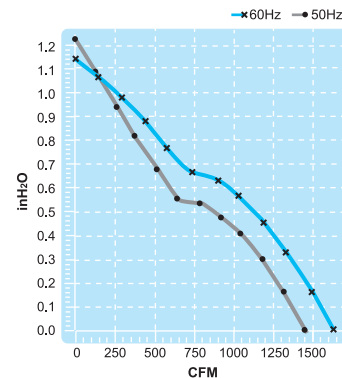

UL
E136370

UL
E136370

CE

ISO 9001
Type Approval
Safety
RoHS Compliant
REACH Compliant
EN 60335-1
EN 60335-2-79

Spec.	Rated Voltage	Frequency	Input Power	Rated Current	Locked Current	Speed	Maximum Air Flow	Maximum Air Flow	Maximum Pressure	Maximum Pressure	Capacitor	Noise	Weight
Model	V	Hz	W	A	A	RPM	m ³ /min.	CFM	mmH ₂ O	InchH ₂ O	μF/VDB	dB	kg
UF300BNA11H1C2A	115V	50	150	1.6	3.15	2650	40.6	1435	31	1.2	20/250	75	4.5
		60	200	2.4	3.10	2950	45.7	1615	29	1.1		78	
UF300BNA23H1C2A	230V	50	150	0.9	1.60	2650	40.6	1435	31	1.2	5/450	75	4.5
		60	200	1.2	1.56	2950	45.7	1615	29	1.1		78	