



# UF250BMB-B Series

Size :  $\varnothing 290 \times 75.9$

Unit : mm

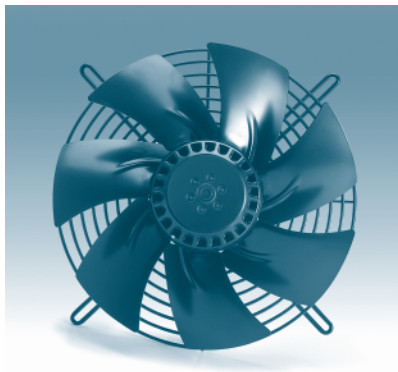


**Thermally-Protected**

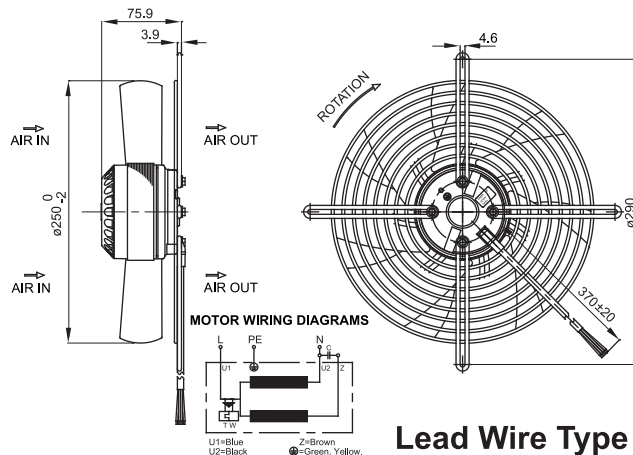

**Lead Wire Type**

**(Axial Fan)**

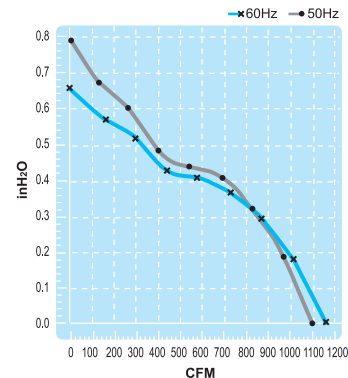

| Spec.           | Rated Voltage | Frequency | Input Power | Rated Current | Locked Current | Speed | Maximum Air Flow     | Maximum Air Flow | Maximum Pressure   | Maximum Pressure     | Capacitor | Noise | Weight |
|-----------------|---------------|-----------|-------------|---------------|----------------|-------|----------------------|------------------|--------------------|----------------------|-----------|-------|--------|
| Model           | V             | Hz        | W           | A             | A              | RPM   | m <sup>3</sup> /min. | CFM              | mmH <sub>2</sub> O | InchH <sub>2</sub> O | μF/VDB    | dB    | kg     |
| UF250BMB11H1C2B | 115V          | 50        | 112         | 1.00          | 1.90           | 2550  | 31                   | 1090             | 20.0               | 0.78                 | 12/250    | 68    | 1.8    |
|                 |               | 60        | 148         | 1.50          | 1.90           | 2700  | 32                   | 1130             | 16.5               | 0.65                 |           | 70    |        |
| UF250BMB23H1C2B | 230V          | 50        | 119         | 0.59          | 0.91           | 2550  | 31                   | 1090             | 20.0               | 0.78                 | 4/450     | 68    | 1.8    |
|                 |               | 60        | 158         | 0.82          | 0.91           | 2700  | 32                   | 1130             | 16.5               | 0.65                 |           | 70    |        |