



PTC ENCLOSURE HEATERS

Enclosure heater use in enclosure for anti-condensation protection. The desing of our heaters supports the natural air convection which air-current of warm air. Our complete range of thermostats and hygrostats can directly be connected to the heaters.

- Wide rane operation voltages.
- Dynamic heating
- Easy mounting on 35 mm DIN rail.
- Auto temperature limiting.
- Connection 1.5 mm² 3 pole terminal.
- Made in Germany PTC resistor core
- Energy saving.
- Space saving instalation desing.

TECHNICAL SPECIFICATIONS

- Operating Voltage : 110-230V AC/DC
- Heating Element : PTC Resistor
- Body Materials : Aluminium Profile
- Surface Temperature : 75 - 85 °C
- Protection Class : IP 20
- Approvals : CE
- Mounting : Clip for 35mm DIN rail.
- Electrical Conneç : 0,75 - 1.5 mm 2 2 poles terminal.

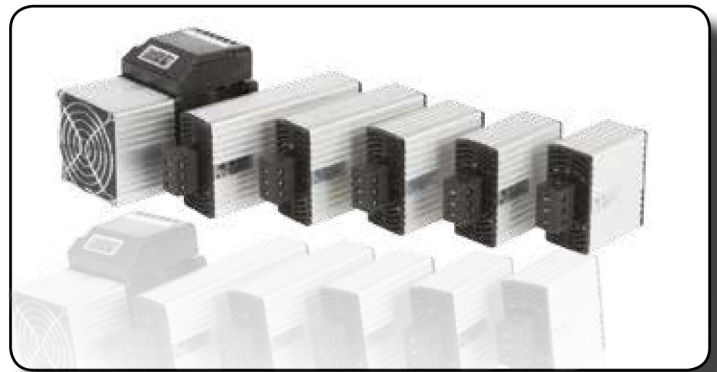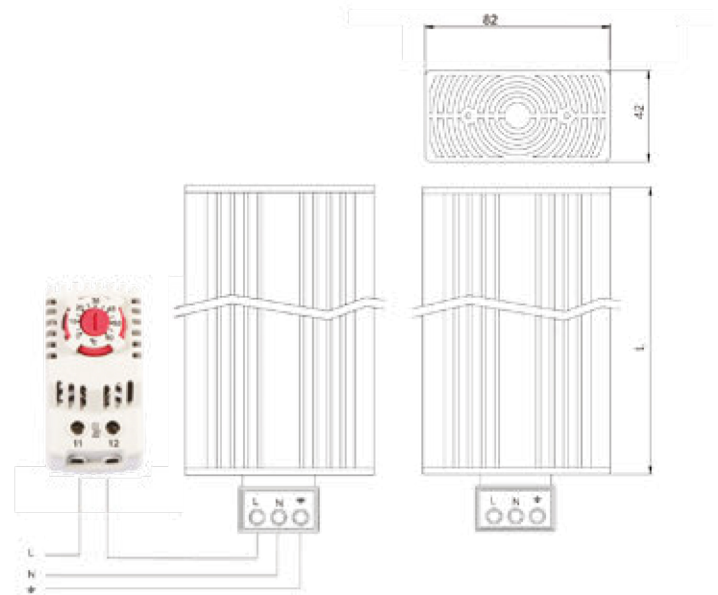

SPECIFICATIONS	ÖZELLİKLER	QHT-20W	QHT-30	QHT-50	QHT-75	QHT-100	QHT-125	QHT-150
VOLTAGE (V)	VOLTAJ (V)	230V	230V	230V	230V	230V	230V	230V
FREQUENCY (Hz)	FREKANS (Hz)	50 60	50 60	50 60	50 60	50 60	50 60	50 60
WATT (W)	WATT (W)	20 20	30 30	50 50	75 75	100 100	125 125	150 150
SURFACE TEMPERATURE	GÖVDE SICAKLIĞI	85°C	85°C	85°C	125°C	125°C	125°C	130°C
IP	IP	20	20	20	20	20	20	20
SIZE (mm)	BOY (mm)	65	75	85	105	120	150	190
HEATER BODY	ISITICI GÖVDE	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
HEATING ELEMENT	ISITICI ELEMENT	PTC	PTC	PTC	PTC	PTC	PTC	PTC
MOUNTING	MONTAJ	DIN35 RAY	DIN35 RAY	DIN35 RAY	DIN35 RAY	DIN35 RAY	DIN35 RAY	DIN35 RAY
CONNECTIONS	BAĞLANTI	1,5 - 2,5 mm ²	1,5 - 2,5 mm ²	1,5 - 2,5 mm ²	1,5 - 2,5 mm ²	1,5 - 2,5 mm ²	1,5 - 2,5 mm ²	1,5 - 2,5 mm ²